Installation guide for external YES! button for BeeXxAP programmers

1. Package contain self adhesive sticker. Paste it to position described by picture bellow:

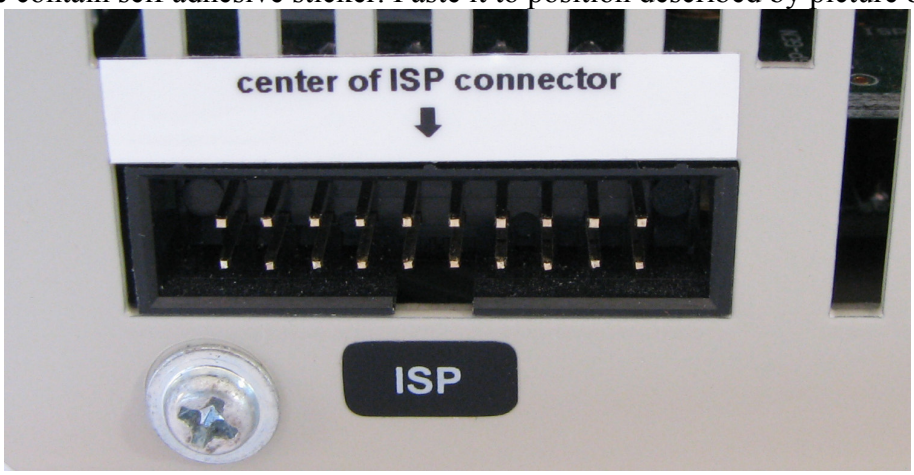

2. Insert connector of **external YES! button for BeeXxAP programmers** to programmer ISP connector. Be aware to raid position of these connectors. Raid position is when arrows are opposite to each other.

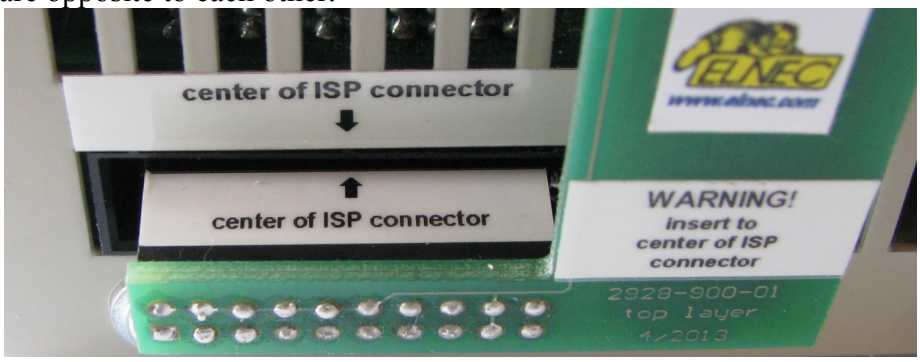

3. Push connector to the final position.